

**LED strip manual**  
liniLED® PCB Mono White G1 & G4





# liniLED®

---

## LED strip PCB Mono White

Technical notes	3
Technical specifications   Deco G1	4
Technical specifications   Power G1	5
Technical specifications   High Power G4	6
Maximum cable length   Deco G1	7
Maximum cable length   Power G1	8
Maximum cable length   High Power G4	9
Area advice	10
Product care and handling	11
Cutting instructions	12
Solder	13
Connect IP00	14
Power and connection diagram	15
Symbols	16

## Technical notes

---

**Read the instructions and safety precautions before installation, usage and storage of the products to secure safety of the user and reliability of the product.**

- Hand over the instructions to the end user and those responsible for installation and usage.
- Triolight B.V. cannot be held responsible for improper handling, product installation, usage or storage.

### Handling

- Handle with care.
- The product may not be modified or converted otherwise than prescribed.
- Products are transported in proper packaging. Products should remain packed until installation.
- Take ESD (Electrostatic Discharge) protection measures when handling liniLED® products.
- The products and their components may not be exposed to mechanical, static loads and other tension/compression other than from the product itself.

### Installation

- ⚠ Attention: The power has to be switched off the main power supply or the connection before installation. Not doing so may damage the product.
- Use a suitable LED power supply/driver: 24 V DC constant voltage. Do not drive the product on other voltages than described in their datasheet/products specifications.
- Installation has to be done by a certified professional with knowledge of electrical circuits or a specialised maintenance person known with valid directives.
- General and local construction-, safety- and installation regulations should be respected.
- Use only supplied parts, accessories and required tools as prescribed in the installation manual to guarantee a safe installation and use of the product.
- Products may solely be installed in the areas according to their prescribed IP-rating, IK-rating, temperature range and chemical resistances.
- The LED strip should be installed on an adequate cooling body for proper heat dissipation to ensure smooth operation and long lifetime.
- Do not fasten anything to the product. The same applies when hanging.
- Do not install the product in the following cases:
  - Damage is visible on the product or its cables.
  - The inside of the product is moistened or dirty.
  - The product or its cables have been modified. This could lead to an electrical shock or a short circuit may occur.
- Children may not play unsupervised with electrical products as they cannot judge the dangers in dealing with electrical circuits correctly.
- Use proper mounting surfaces when installing in environments with large variations in temperature and operating lengths more than 2 metres. This should absorb the stress of any difference in expansion.

### Operation and use

**Solely use the product when it's working correctly. If not, switch the power off immediately and ask an electrical specialist for advice in the following cases:**

- Damage is visible on the product and/or the product does not function.
- The product is overheating and/or smoke or steam rises from the product.
- Crackling sounds are noticeable.

Repairs on the installation may only be performed by qualified electricians. Product repairs may solely be done by Triolight B.V.

### Cleaning and maintenance

- ⚠ Attention: Disconnect the power before maintenance and cleaning.
- Dust and dirt accumulated over time should be removed from the light emitting surface to assure optimal functioning of the product.
- Paints, solvents and corrosive cleaning chemicals may not contact and thus affect the product.

### Environment and waste

- Exterior decorative lighting should only be used after sunset.
- This product may not be treated as household waste. Dispose of the material through the waste recycling of electrical and electronic equipment.

### Warranty

**This product comes with a 2 year warranty. Warranty void if:**

- The installation guide has not been consulted (installation mistake).
- The installation is not done by a certified installer.
- Local rules and guidelines are not respected.
- The invoice cannot be shown and/or has been altered.
- Damage is caused by negligence, abnormal use or improper handling, use, maintenance and/or cleaning of the product.

## Technical specifications | Deco G1

	Extra Warm White 2700K D G1	Warm White 3000K D G1
Product code [m]	12430	12431
Power (24V DC)	1.6 W/m	1.6 W/m
Power (25V DC)	1.7 W/m	1.7 W/m
CCT <sup>1</sup>	2750K	3065K
CRI	>80	>80
Luminous flux <sup>1</sup>	190 lm/m	205 lm/m
Luminous efficiency <sup>1</sup>	119 lm/W	128 lm/W
Spool length	Max. 50 m	
Section length	100 mm	
LED type	3014	
Number of LEDs	7 per section/70 per metre	
Max. connection length	20 m	
Min. operating voltage	23V DC	
Max. operating voltage	25V DC	
Beam angle	120°	
Dimensions	8 x 1.4 mm	
Dimmable	PWM dimming, 24V DC Common Anode	
MacAdam Steps	3 steps	
Weight	9 gram per metre	
Expected lifetime	L80/B10 > 60,000 hrs @ Tc = 40°C	
Ingress protection	IP00	
Storage temperature	-40°C ... 80°C	
Operating temperature <sup>2</sup>	-30°C ... 75°C	
Minimum bending radius	20 mm	

<sup>1</sup> Typical values are given, which due to tolerances in components and production process can vary up to 10%.

<sup>2</sup> Max. connection length between -30°C and -20°C is 14 metres.

### Product drawing



## Technical specifications | Power G1

	Extra Warm White 2700K P G1	Warm White 3000K P G1	Natural White 4000K P G1
Product code [m]	12435	12436	12437
Power (24V DC)	3.9 W/m	3.9 W/m	3.9 W/m
Power (25V DC)	4.1 W/m	4.1 W/m	4.1 W/m
CCT <sup>1</sup>	2750K	3065K	4030K
CRI	>80	>80	>80
Luminous flux <sup>1</sup>	480 lm/m	520 lm/m	520 lm/m
Luminous efficiency <sup>1</sup>	123 lm/W	133 lm/W	133 lm/W
Spool length	Max. 50 m		
Section length	100 mm		
LED type	3014		
Number of LEDs	7 per section/70 per metre		
Max. connection length	10 m		
Min. operating voltage	23V DC		
Max. operating voltage	25V DC		
Beam angle	120°		
Dimensions	8 x 1.4 mm		
Dimmable	PWM dimming, 24V DC Common Anode		
MacAdam Steps	3 steps		
Weight	9 gram per metre		
Expected lifetime	L80/B10 > 60,000 hrs @ Tc = 40°C		
Ingress protection	IP00		
Storage temperature	-40°C ... 80°C		
Operating temperature <sup>2</sup>	-30°C ... 75°C		
Minimum bending radius	20 mm		

<sup>1</sup> Typical values are given, which due to tolerances in components and production process can vary up to 10%.

<sup>2</sup> Max. connection length between -30°C and -20°C is 7 metres.

### Product drawing




## Technical specifications | High Power G4

	Extra Warm White 2700K HP G4	Warm White 3000K HP G4	Natural White 4000K HP G4
Product code [m]	12252	12253	12254
Power (24V DC)	7.7 W/m	7.0 W/m	7.0 W/m
Power (25V DC)	8.0 W/m	7.3 W/m	7.3 W/m
CCT <sup>1</sup>	2750K	3065K	4030K
CRI	>80	>80	>80
Luminous flux <sup>1</sup>	800 lm/m	800 lm/m	800 lm/m
Luminous efficiency <sup>1</sup>	104 lm/W	114 lm/W	114 lm/W
Spool length	Max. 50 m		
Section length	50 mm		
LED type	3014		
Number of LEDs	6 per section/120 per metre		
Max. connection length	10 m		
Min. operating voltage	23V DC		
Max. operating voltage	25V DC		
Beam angle	120°		
Dimensions	8 x 1.4 mm		
Dimmable	PWM dimming, 24V DC Common Anode		
MacAdam Steps	3 steps		
Weight	9 gram per metre		
Expected lifetime	L80/B10 > 60,000 hrs @ Tc = 40°C		
Ingress protection	IP00		
Storage temperature	-40°C ... 80°C		
Operating temperature <sup>2</sup>	-30°C ... 75°C		
Minimum bending radius	20 mm		

<sup>1</sup> Typical values are given, which due to tolerances in components and production process can vary up to 10%.

<sup>2</sup> Max. connection length between -30°C and -20°C is 7 metres.

### Product drawing

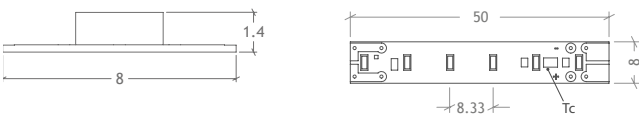

## Maximum cable length | Deco G1


1 = Select colour temperature.

2 = Select LED strip length.

3 = Select output voltage.

4 = Select cable cross section.

**Result** = Maximum cable length based on the cable thickness and power supply voltage.

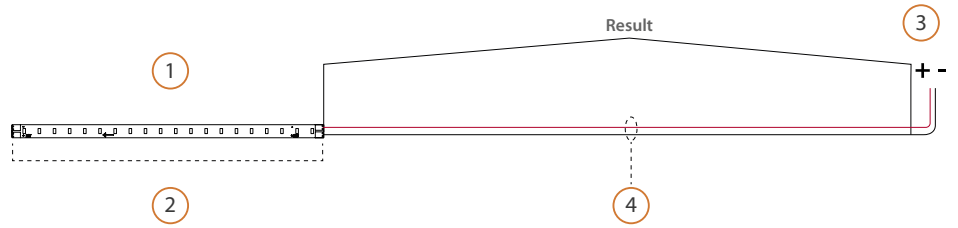

### 1. Colour temperature

2700K | 3000K

2. LED strip length		1.0 m		5.0 m		10.0 m		20.0 m	
3. Voltage		24 VDC	25 VDC	24 VDC	25 VDC	24 VDC	25 VDC	24 VDC	25 VDC
4. Cable cross section	0.50 mm <sup>2</sup> - 0.035 Ω/m	192.4 m	370.6 m	37.4 m	73.0 m	18.0 m	35.9 m	8.4 m	17.3 m
	0.75 mm <sup>2</sup> - 0.023 Ω/m	289.4 m	557.5 m	56.3 m	109.9 m	27.2 m	54.0 m	12.6 m	26.0 m
	1.00 mm <sup>2</sup> - 0.018 Ω/m	384.8 m	741.2 m	74.9 m	146.1 m	36.1 m	71.8 m	16.8 m	34.6 m
	1.50 mm <sup>2</sup> - 0.012 Ω/m	578.8 m	1115.0 m	112.6 m	219.9 m	54.4 m	108.0 m	25.2 m	52.0 m
	2.50 mm <sup>2</sup> - 0.007 Ω/m	963.4 m	1855.7 m	187.5 m	366.0 m	90.5 m	179.7 m	42.0 m	86.6 m

⚠ **Note:** Calculations are based on a standard connector with 1 metre cable (0.5 mm<sup>2</sup>).



## Maximum cable length | Power G1


1 = Select colour temperature.

2 = Select LED strip length.

3 = Select output voltage.

4 = Select cable cross section.

**Result** = Maximum cable length based on the cable thickness and power supply voltage.

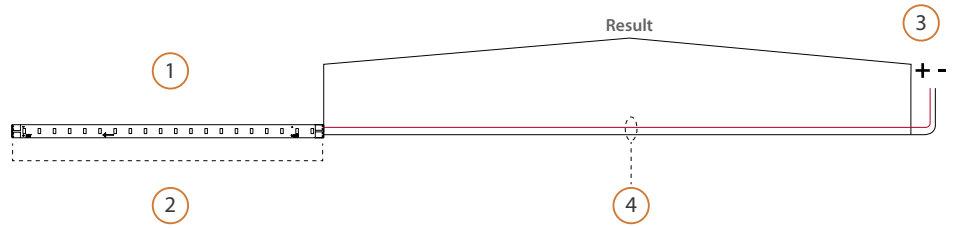

### 1. Colour temperature

**3000K**

2. LED strip length		1 m		2 m		5 m		10 m	
3. Voltage		24 VDC	25 VDC	24 VDC	25 VDC	24 VDC	25 VDC	24 VDC	25 VDC
4. Cable cross section	0.50 mm <sup>2</sup> - 0.035 Ω/m	78.1 m	151.2 m	38.4 m	75.0 m	14.6 m	29.2 m	6.6 m	13.9 m
	0.75 mm <sup>2</sup> - 0.023 Ω/m	117.6 m	227.5 m	57.8 m	112.8 m	21.9 m	43.9 m	10.0 m	21.0 m
	1.00 mm <sup>2</sup> - 0.018 Ω/m	156.3 m	302.5 m	76.8 m	150.0 m	29.2 m	58.4 m	13.3 m	27.9 m
	1.50 mm <sup>2</sup> - 0.012 Ω/m	235.2 m	455.1 m	115.6 m	225.6 m	43.9 m	87.9 m	20.0 m	42.0 m
	2.50 mm <sup>2</sup> - 0.007 Ω/m	391.4 m	757.5 m	192.5 m	375.5 m	73.1 m	146.3 m	33.3 m	69.9 m

**⚠ Note:** Calculations are based on a standard connector with 1 metre cable (0.5 mm<sup>2</sup>).

## Maximum cable length | High Power G4


1 = Select colour temperature.

2 = Select LED strip length.

3 = Select output voltage.

4 = Select cable cross section.

**Result** = Maximum cable length based on the cable thickness and power supply voltage.

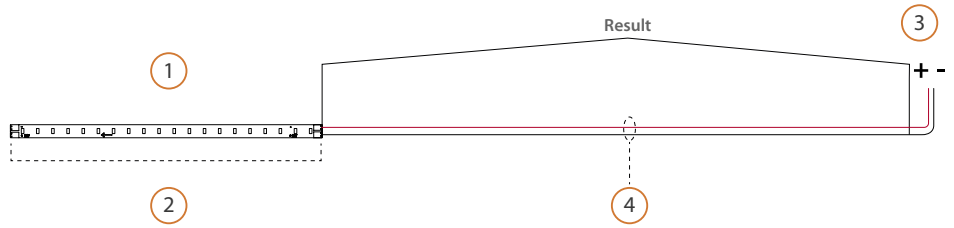

### 1. Colour temperature


**3000K**

2. LED strip length		1 m		2 m		5 m		10 m	
3. Voltage		24 VDC	25 VDC	24 VDC	25 VDC	24 VDC	25 VDC	24 VDC	25 VDC
4. Cable cross section	0.50 mm <sup>2</sup> - 0.035 Ω/m	42.9 m	83.7 m	20.8 m	41.2 m	7.5 m	15.7 m	3.1 m	7.2 m
	0.75 mm <sup>2</sup> - 0.023 Ω/m	64.6 m	125.9 m	31.3 m	62.0 m	11.3 m	23.6 m	4.7 m	10.8 m
	1.00 mm <sup>2</sup> - 0.018 Ω/m	85.9 m	167.4 m	41.7 m	82.4 m	15.1 m	31.4 m	6.2 m	14.4 m
	1.50 mm <sup>2</sup> - 0.012 Ω/m	129.3 m	251.8 m	62.7 m	124.0 m	22.7 m	47.2 m	9.4 m	21.7 m
	2.50 mm <sup>2</sup> - 0.007 Ω/m	215.2 m	419.2 m	104.4 m	206.3 m	37.9 m	78.6 m	15.7 m	36.1 m


**⚠ Note:** Calculations are based on a standard connector with 1 metre cable (0.5 mm<sup>2</sup>).

## Area advice

Depending on the area where the liniLED® LED strip is installed we offer a range of solutions to cope with external factors. The product portfolio for the liniLED® PCB LED strip includes an IP00 connector.

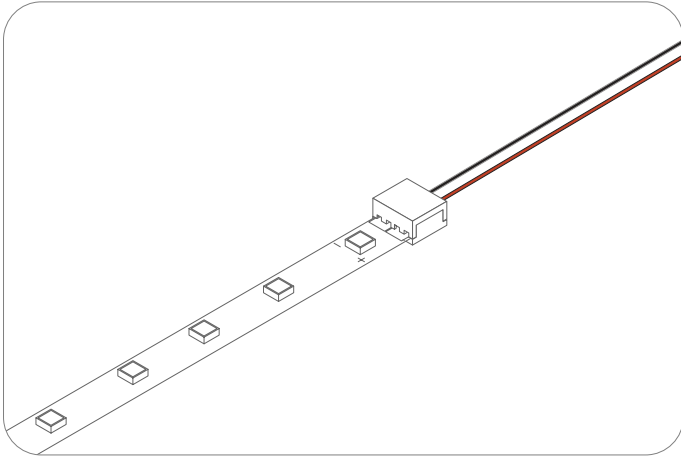


Indoor environment | (IP00) | liniLED® PCB Connector Set  
Product code: 11808

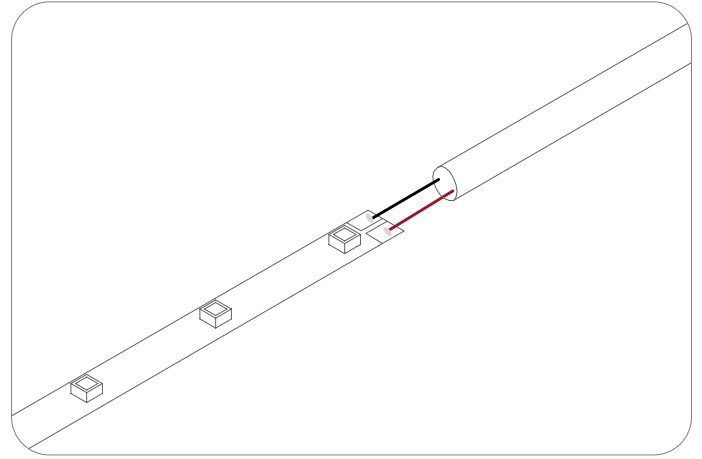


Indoor environment | (IP00)  
Solder


## Product care and handling

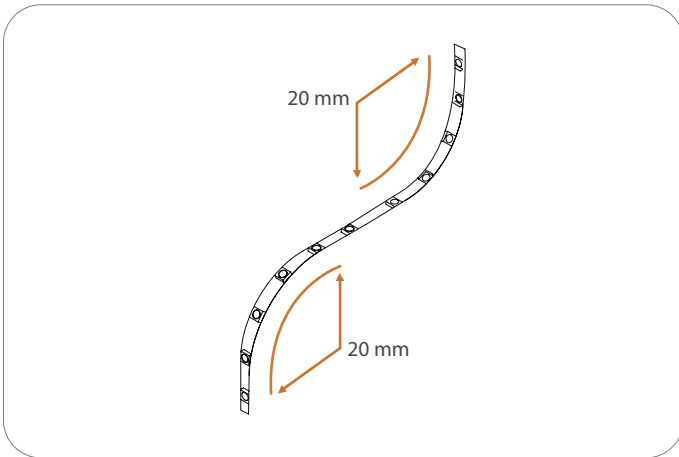


Maximum bending radius is 20 mm. Solely bend up or downward.

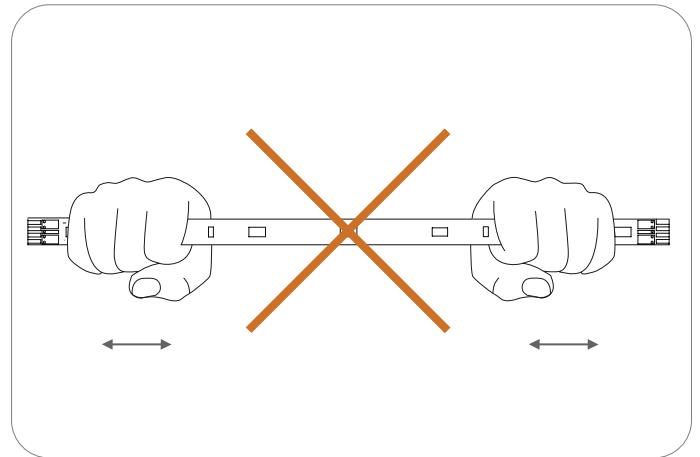


⚠ Do not compress or stretch the LED strip.

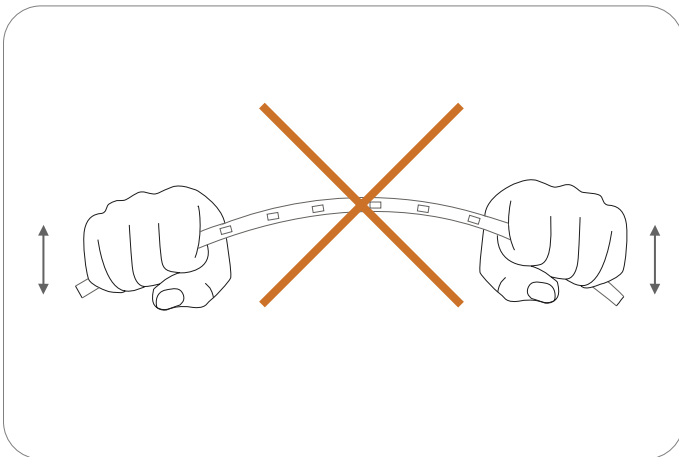

⚠ Do not bend the LED strip sideways.

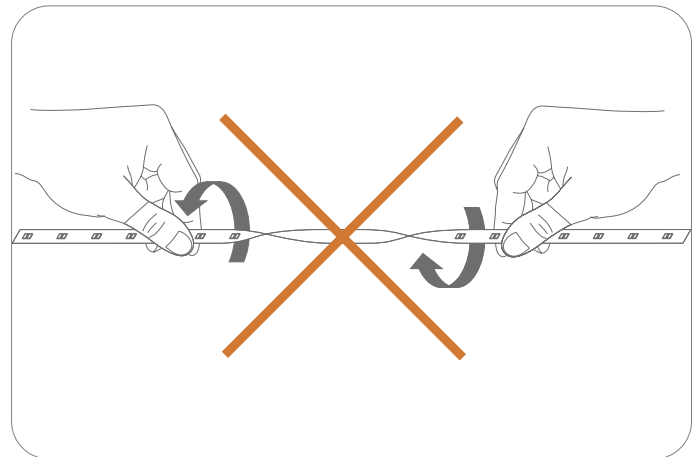


⚠ Do not twist the LED strip.

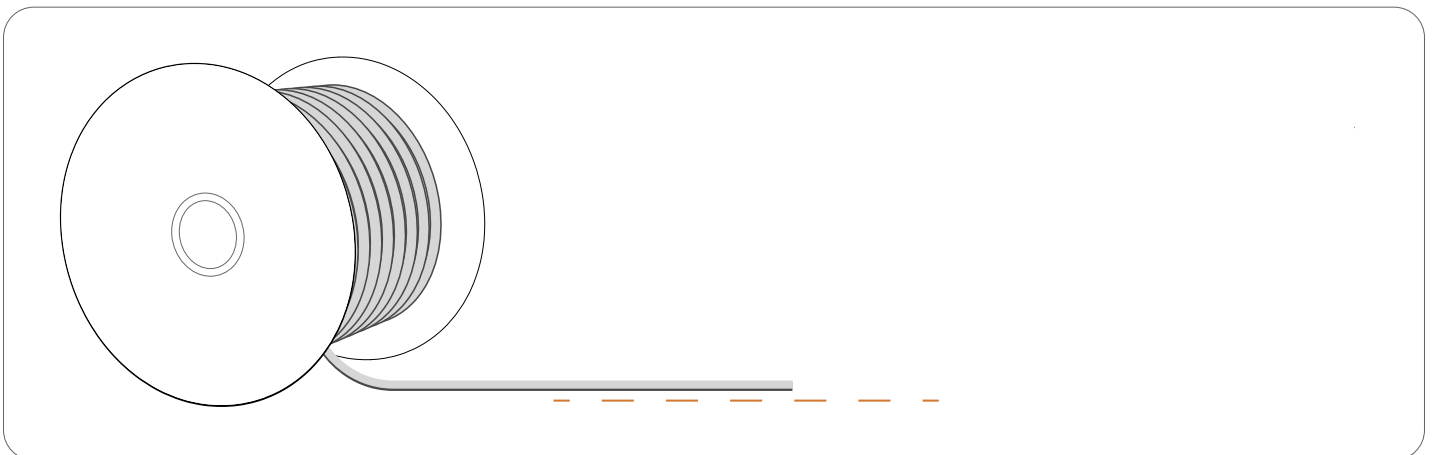


The LED strip has to be unreeled on a horizontal surface at the time of installation. Do not unroll the spool of LED strip before installation.


## Cutting instructions

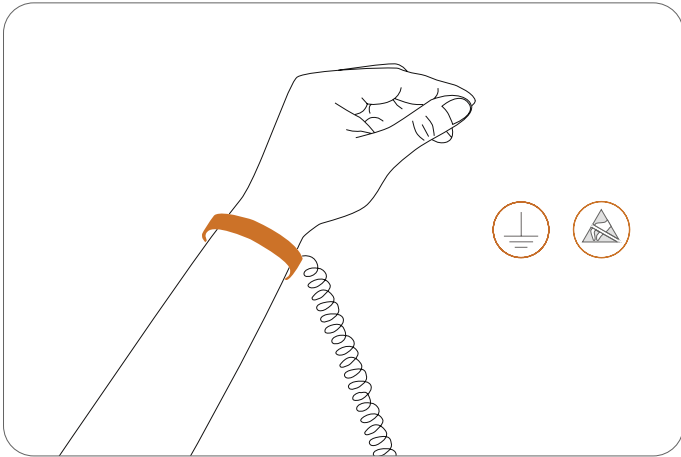

Work in an ESD protected environment. Make use of an anti-static strap.

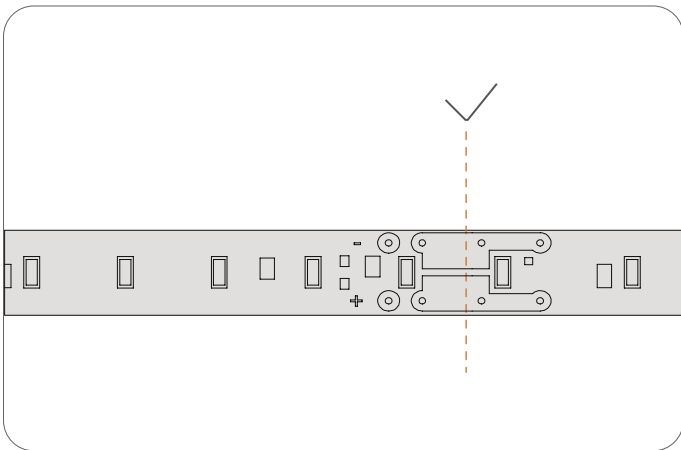

**Top view** | Only cut on the dotted lines to prevent damaging the LED strip.

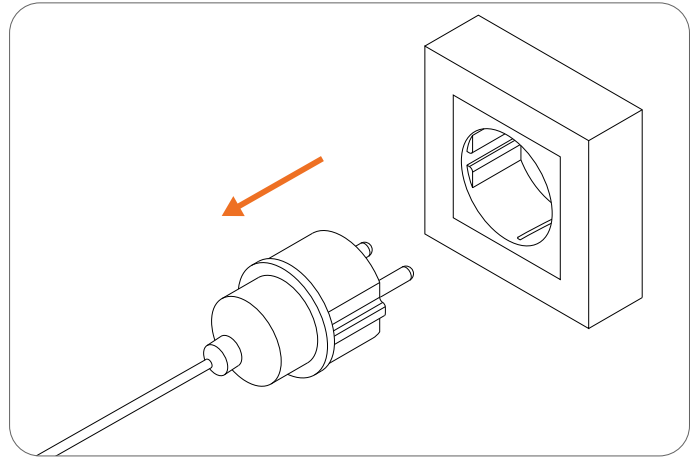


Turn off the power before cutting the LED strip.


## Solder




⚠ Work in an ESD protected environment. Make use of an anti-static strap and use lead-free solder.

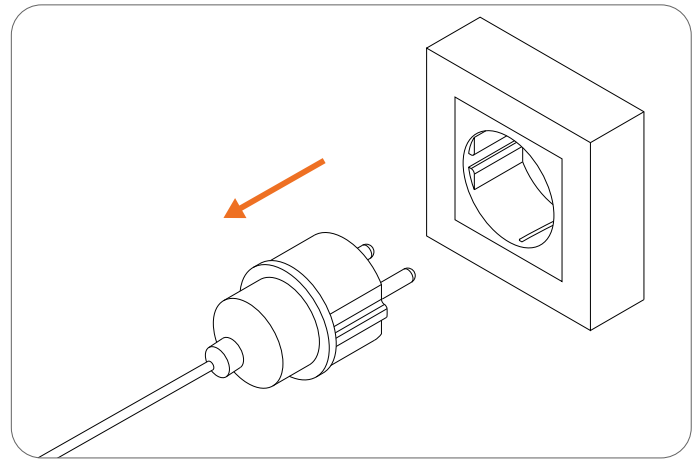


⚠ Turn off the power. Make sure the wires are not under electric current.

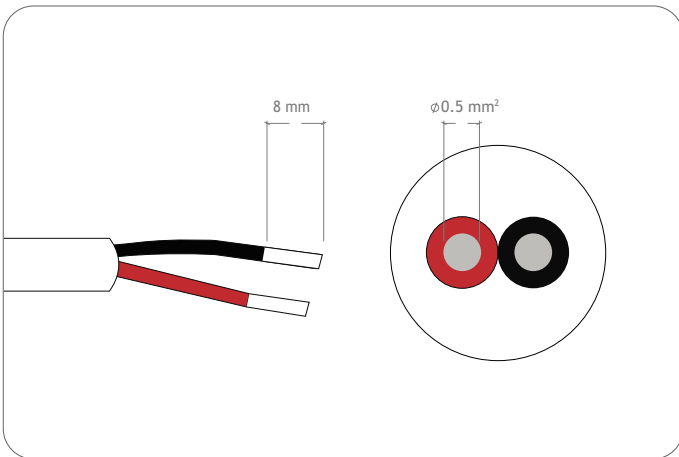


We advise to use a cable with an area not larger than 0.5 mm<sup>2</sup>.

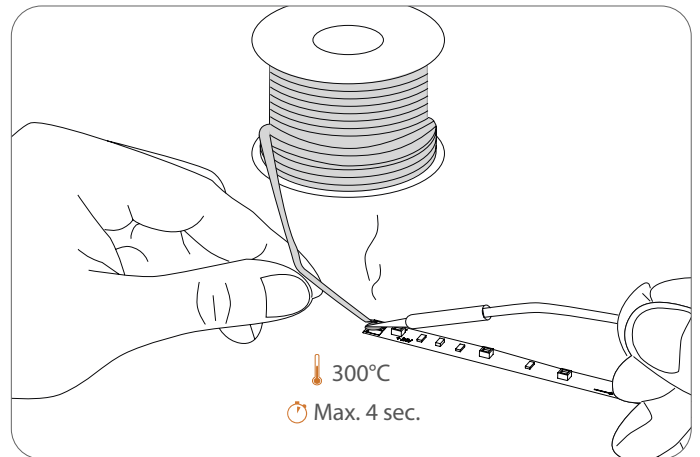

Pre-solder the connector pads.

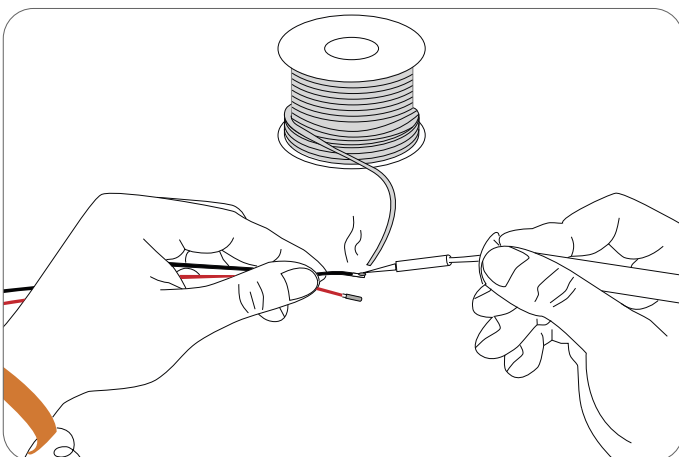


Pre-solder the wires.

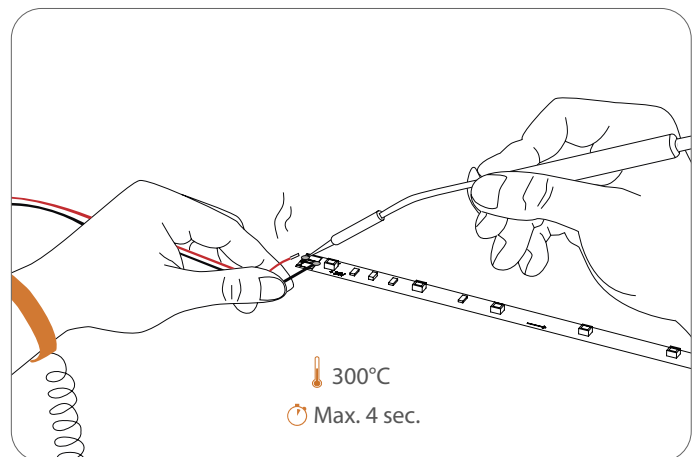


Solder the wires to the connector pads.


## Connect IP00

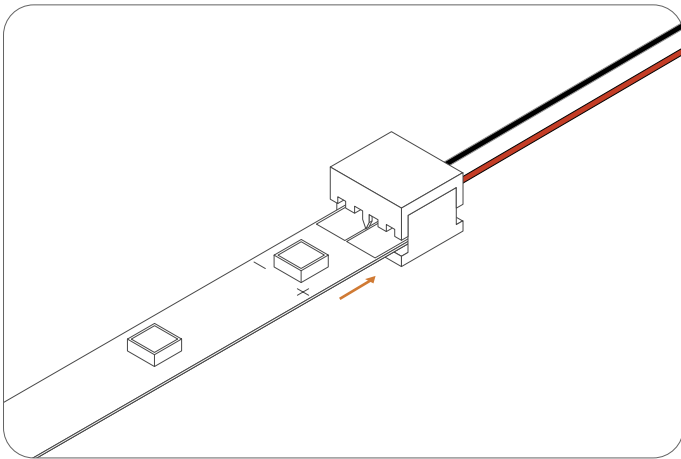

Open the PCB connector.

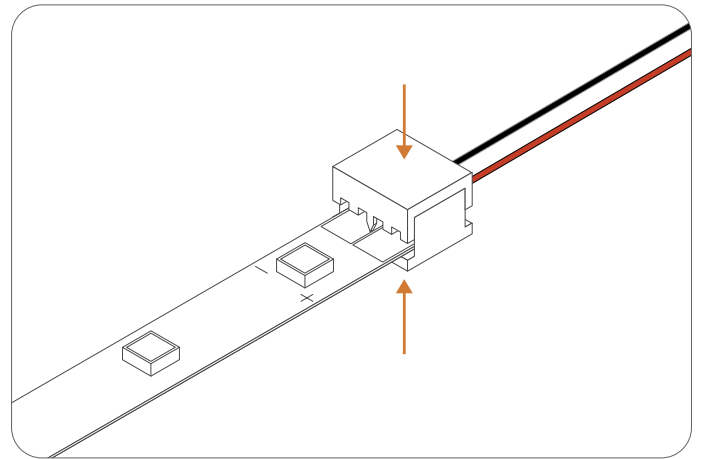


Push the liniLED® PCB LED strip into the connector. Make sure the polarity is correct and the connection pads are facing up.

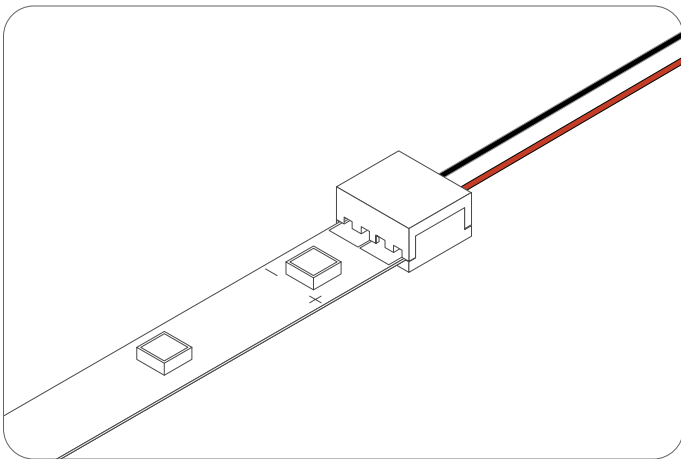


Close the PCB connector.

## Power and connection diagram

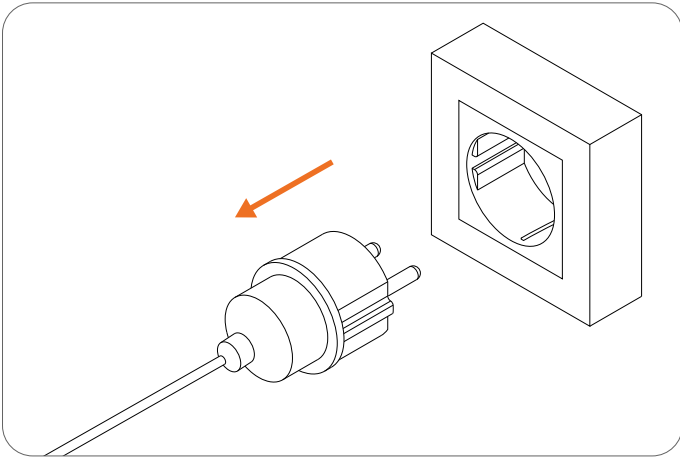

⚠ Turn off the power. Make sure the wires are not under electric current.

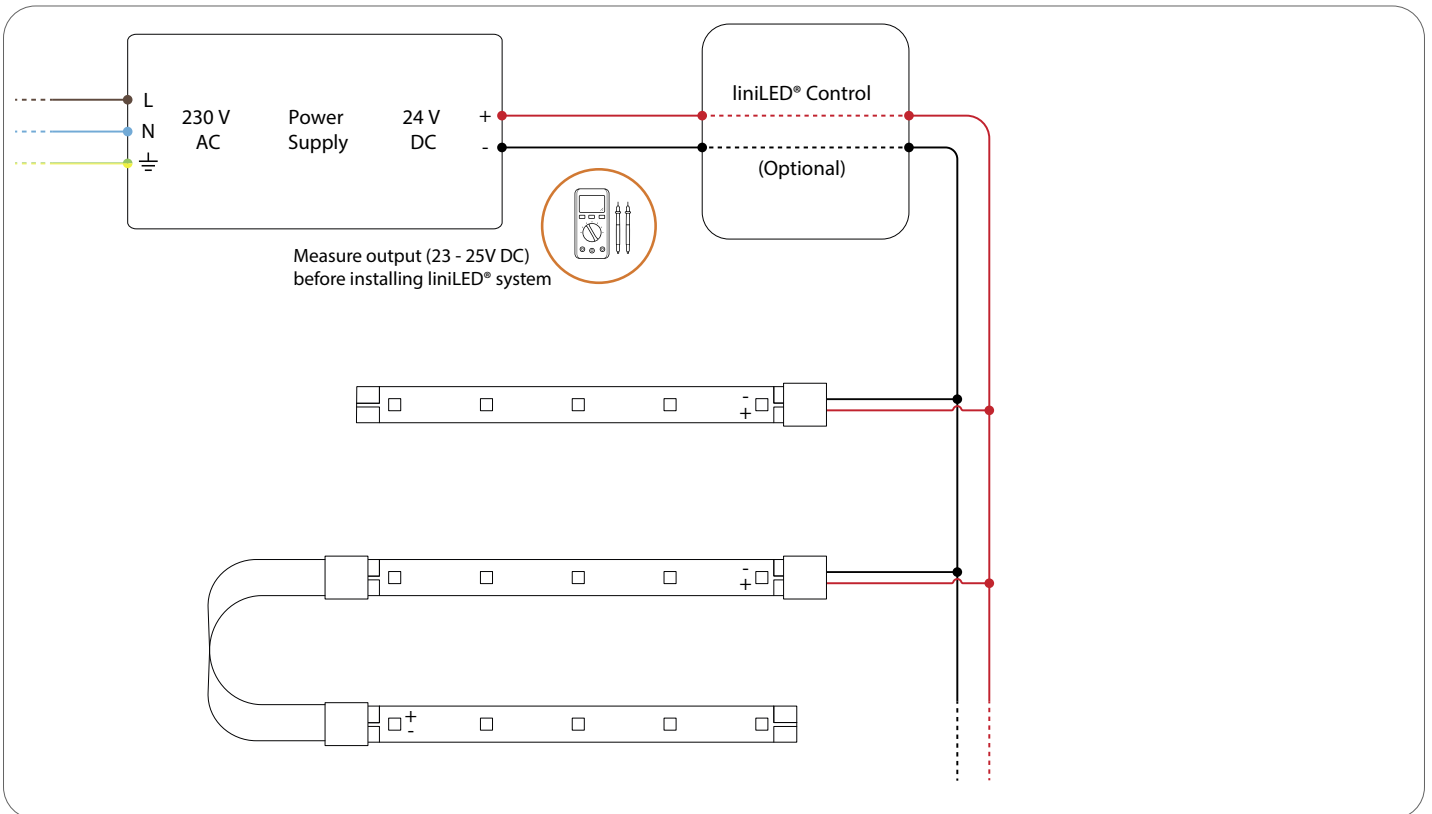



## Symbols

---



Electro Static Discharge (ESD) sensitive device, apply standard ESD precautions when handling the product.



Manufacturer's declaration that the product meets the applicable EC directives.



Suitable for mounting on all surfaces and suitable to cover with insulating material.



Restriction of Hazardous Substances (RoHS): product complies with the RoHS directive and each homogeneous material does not exceed the limits for the materials mentioned under the RoHS directive (Pb, Hg, Cd, Cr6+, PBB and PBDE).



Not protected against ingress of solid foreign objects. Not-protected against ingress of water.



Bending of the LED strip is possible with a radius of  $\geq 20$  millimetres in the specified direction.



Operating voltage of 24 V DC.



Electrical appliance class III: this product is designed to be supplied from an extra-low voltage ( $\leq 60.0$  V DC or  $\leq 42.4$  V AC).



System guarantee of 5 years when the complete system consist of liniLED® products with the 5 years system warranty logo. Terms & conditions apply.



White colour consistency up to 2 SDCM ellipse over an entire single strip length. LEDs used are single BIN 3 SDCM ellipse, but their careful combination in a LED strip during the production process, results in a mixed light through a diffusive material which is within a 2 SDCM ellipse (probability  $>90\%$ ). Due to variability this is not legally binding. The guaranteed colour consistency can be found in the technical specifications.

## Disclaimer

---

The published information is checked to be as accurate as possible, however Triolight B.V. or any reseller of liniLED® cannot be held liable for any damages resulting from misprints, errors, modifications or outdated information. No legal rights can be derived from this document. Triolight B.V. reserves the right to modify the information without informing the customers. Please check for the latest version on [www.liniLED.com](http://www.liniLED.com). This product should not be used in applications, devices or systems where incorrect operation of the product may result in personal injury (includes emergency lighting) without written permission from the board of Triolight B.V. If nevertheless used in such applications, devices or systems, Triolight B.V. cannot be held liable for any resulting injury. liniLED® is a registered trademark of Triolight B.V.





